

FIGURE 1

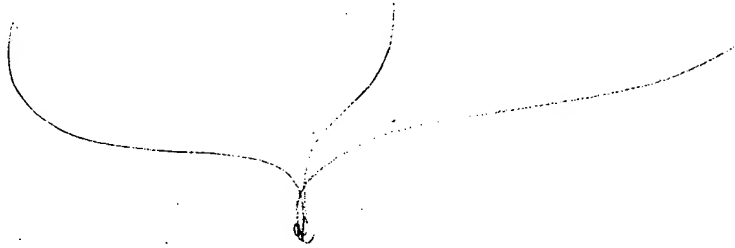
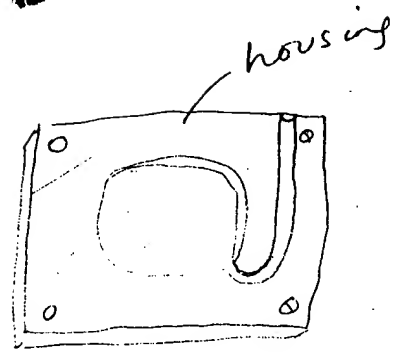
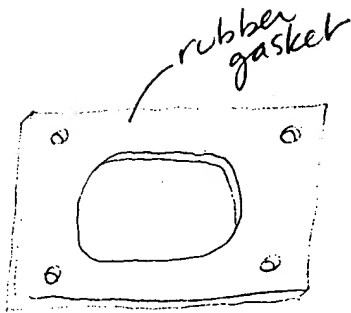



FIGURE 2

09750384-011101

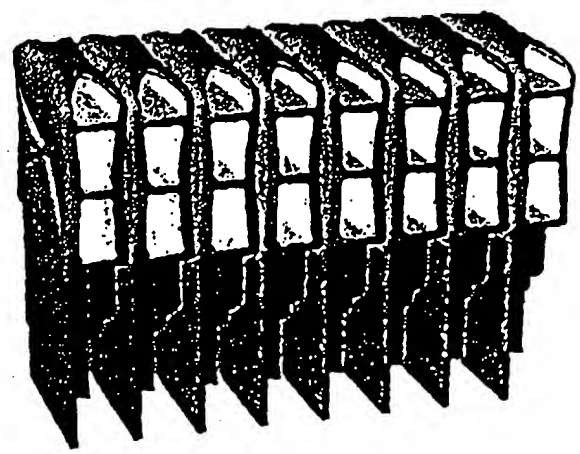
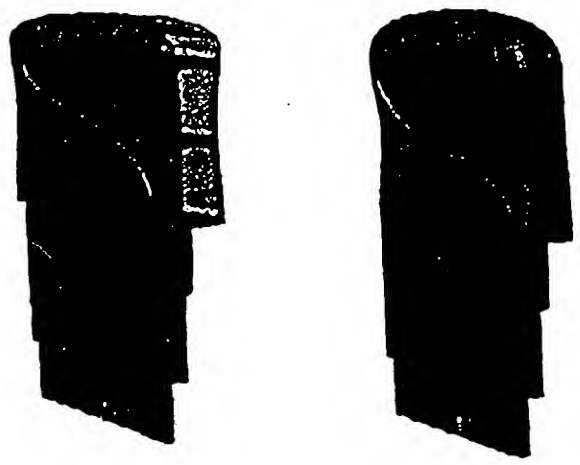
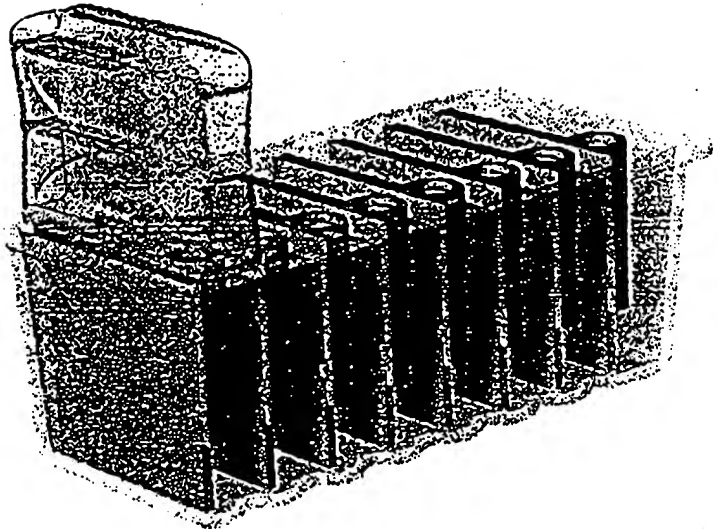
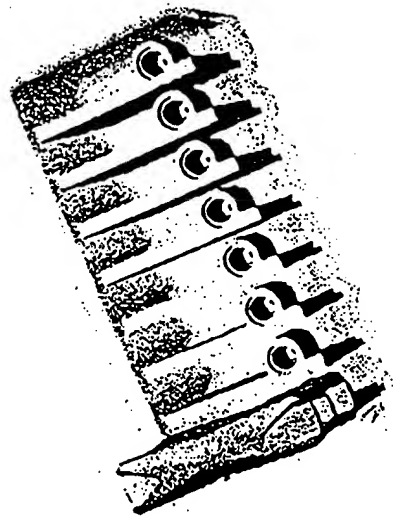
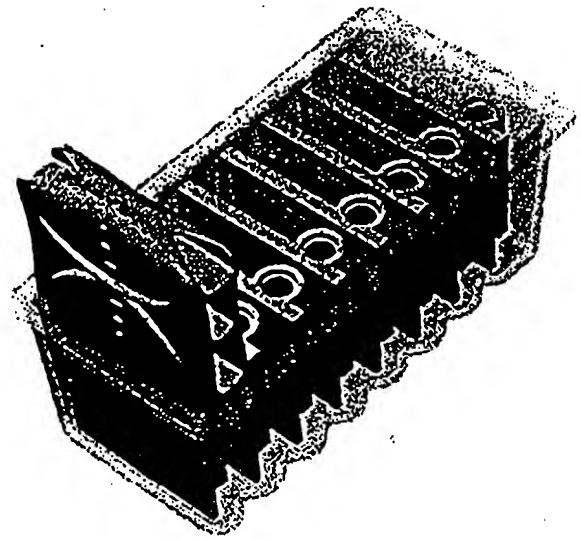
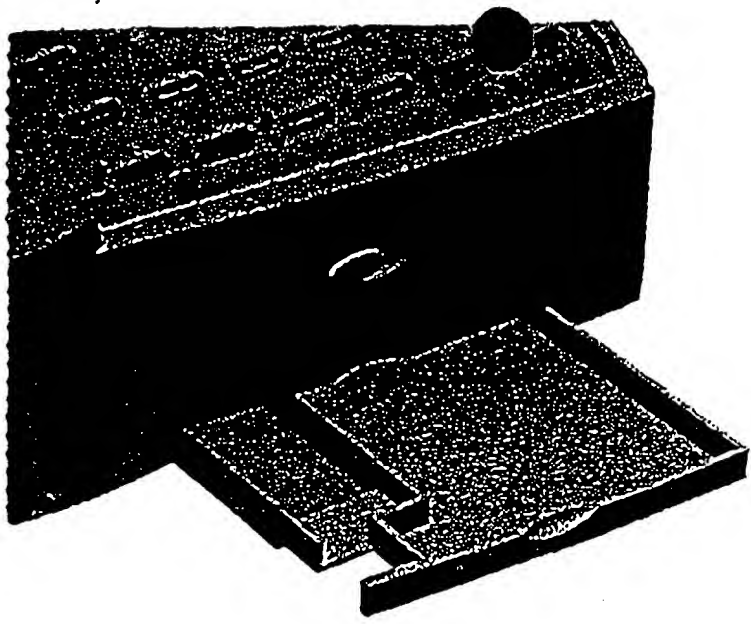


FIGURE 3

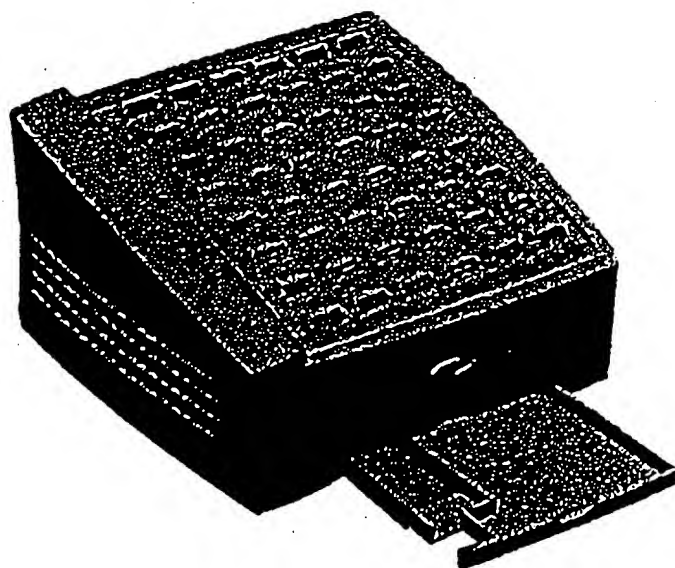
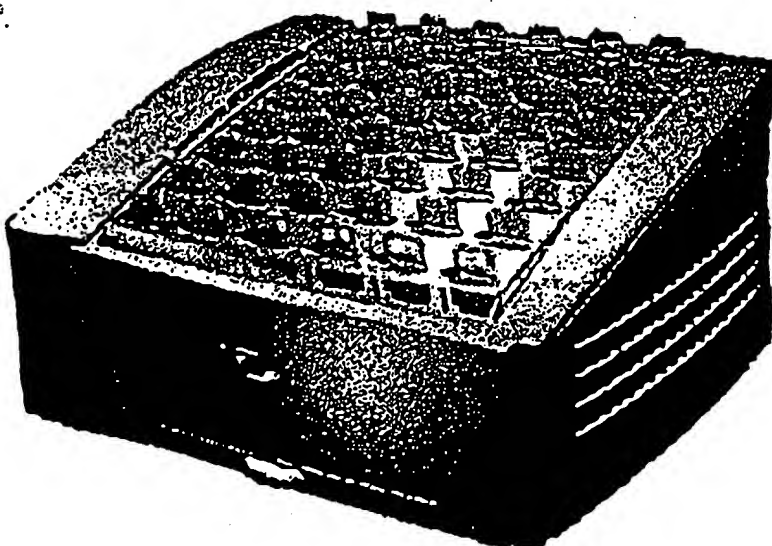
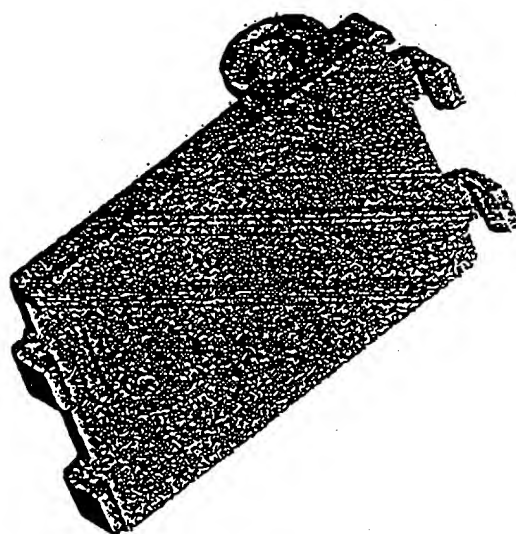
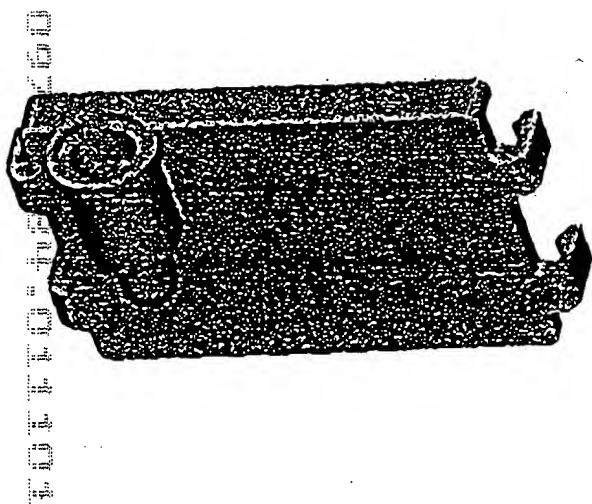
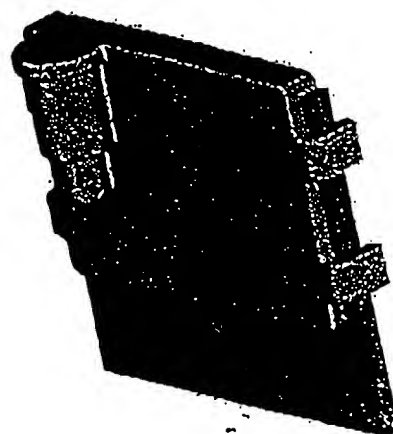
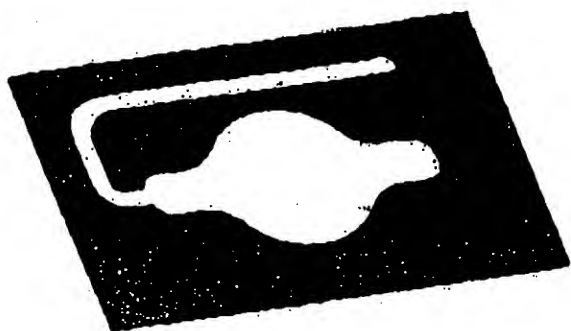


FIGURE 4

00101300500


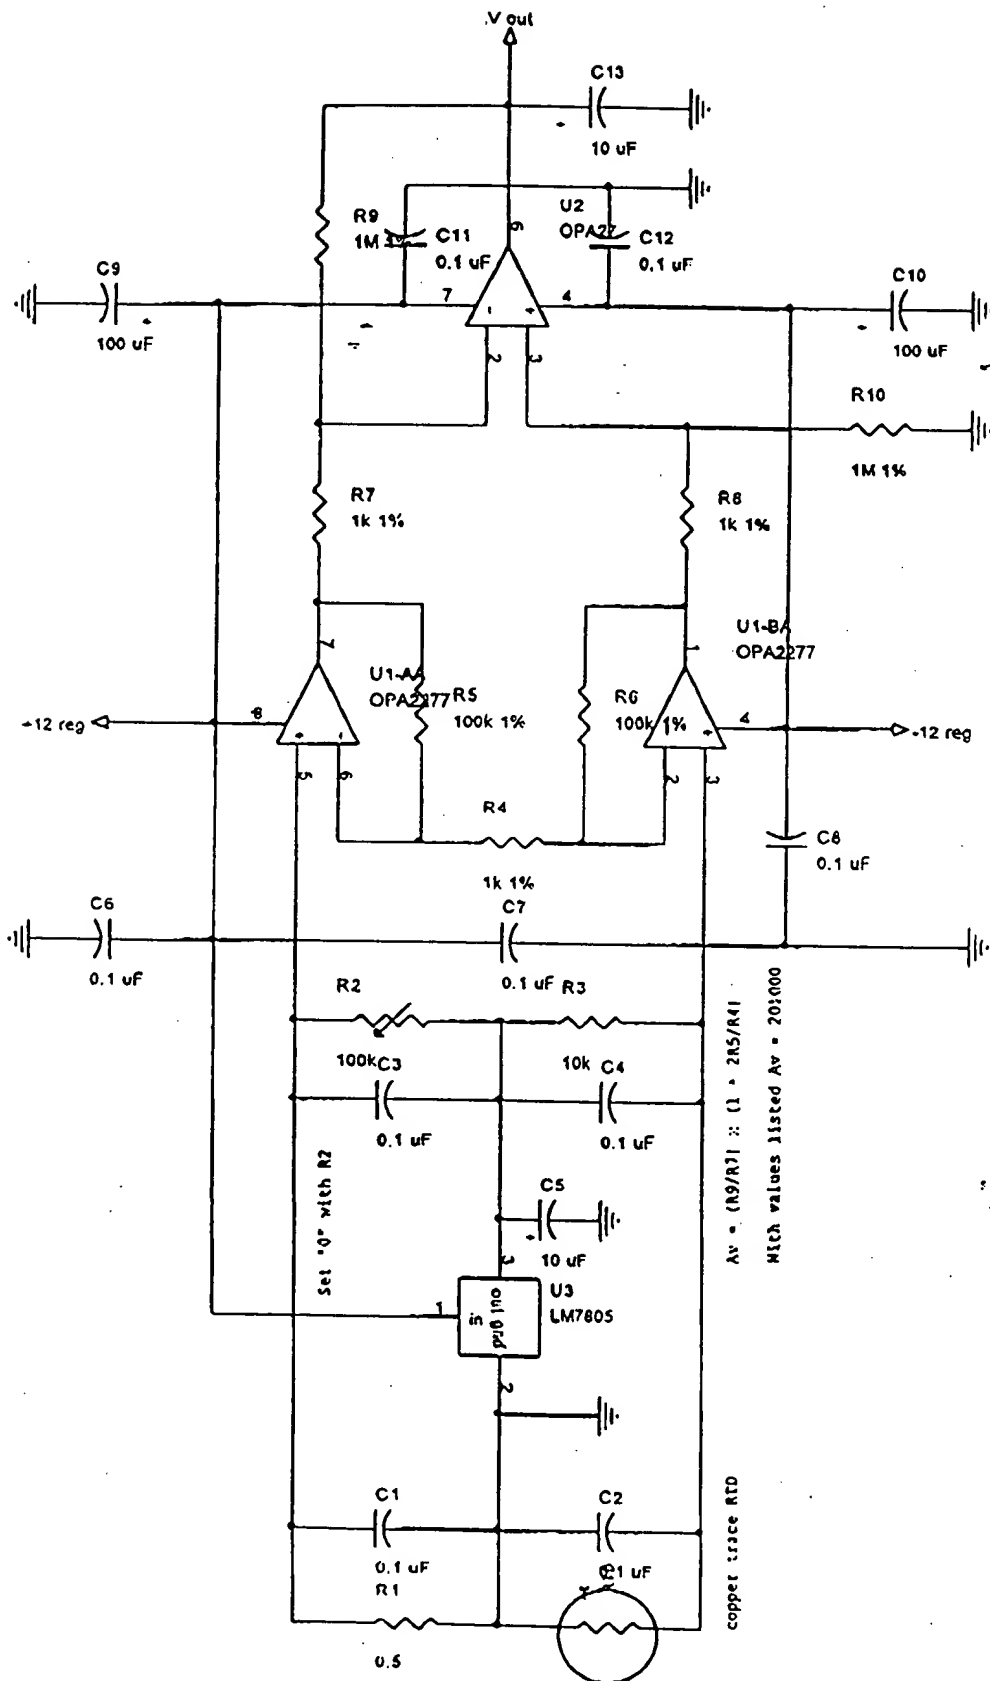


FIGURE 5

THE UNIVERSITY OF CHICAGO

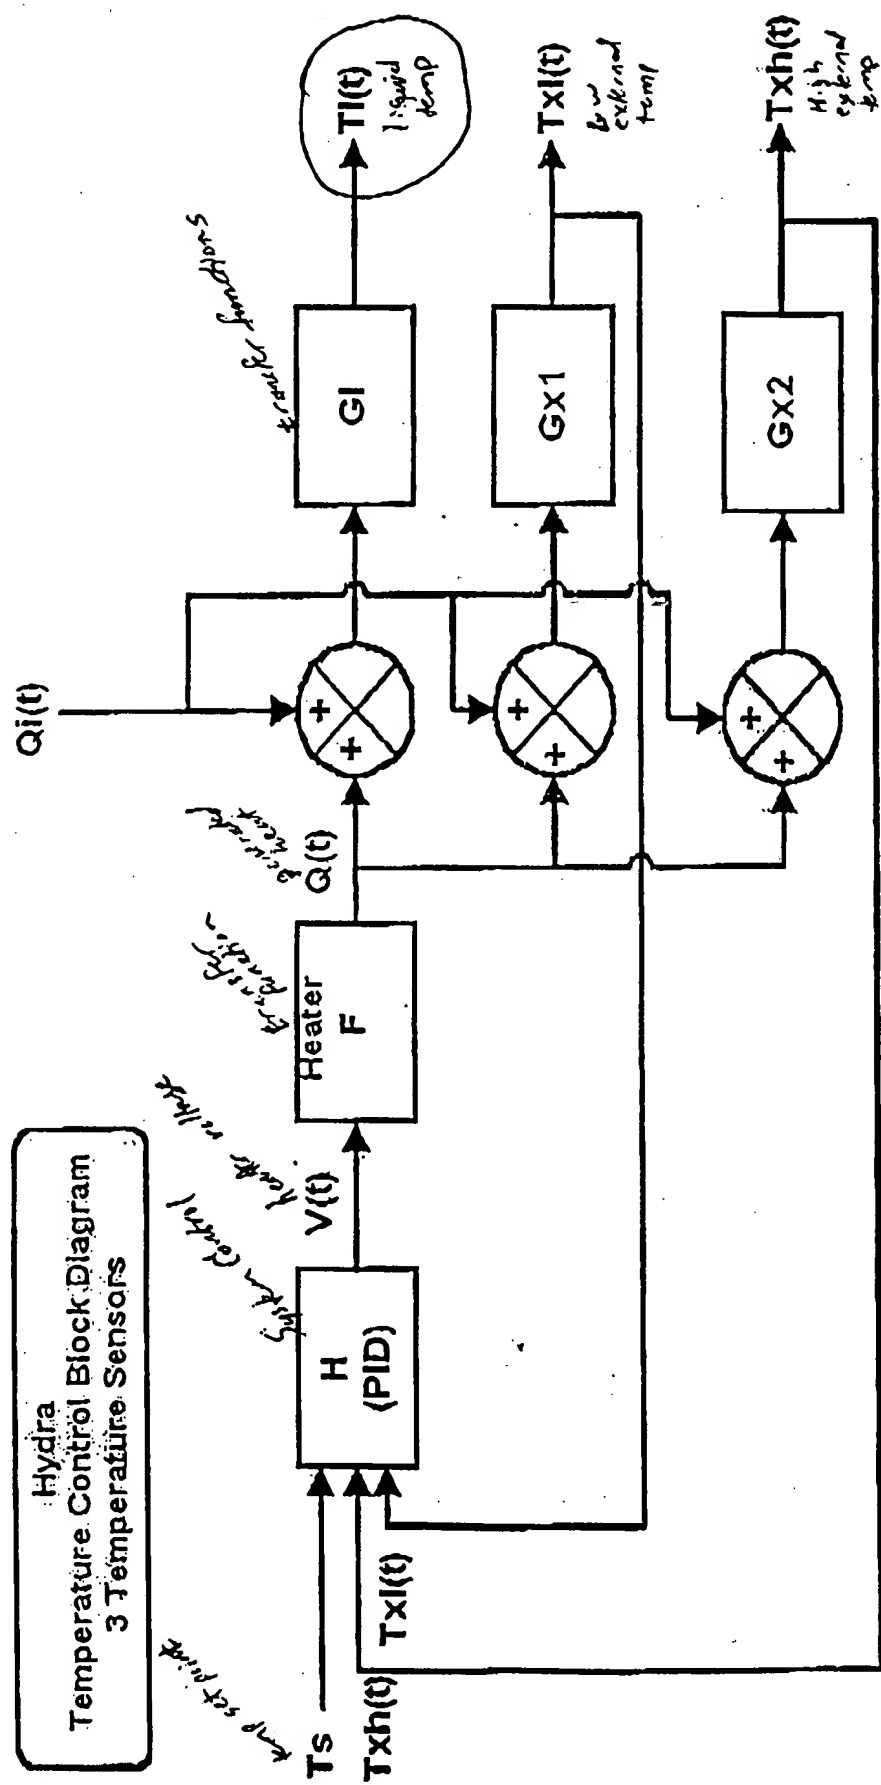

F, G1, Gx1, Gx2 = transfer functions (unknown)
H = system control function (tbd)

- Ts = Temperature set point
- Txl = Xternal temperature 1, low (measured)
- Tx2 = Xternal temperature 2, high (measured)
- Tl = Liquid temperature (desired)
- V(t) = Heater voltage (driven)
- Q(t) = Generated heat (driven)
- Qi(t) = Interfering heat (unknown)

FIGURE 6

FOUO-13E09460

Board Assembly

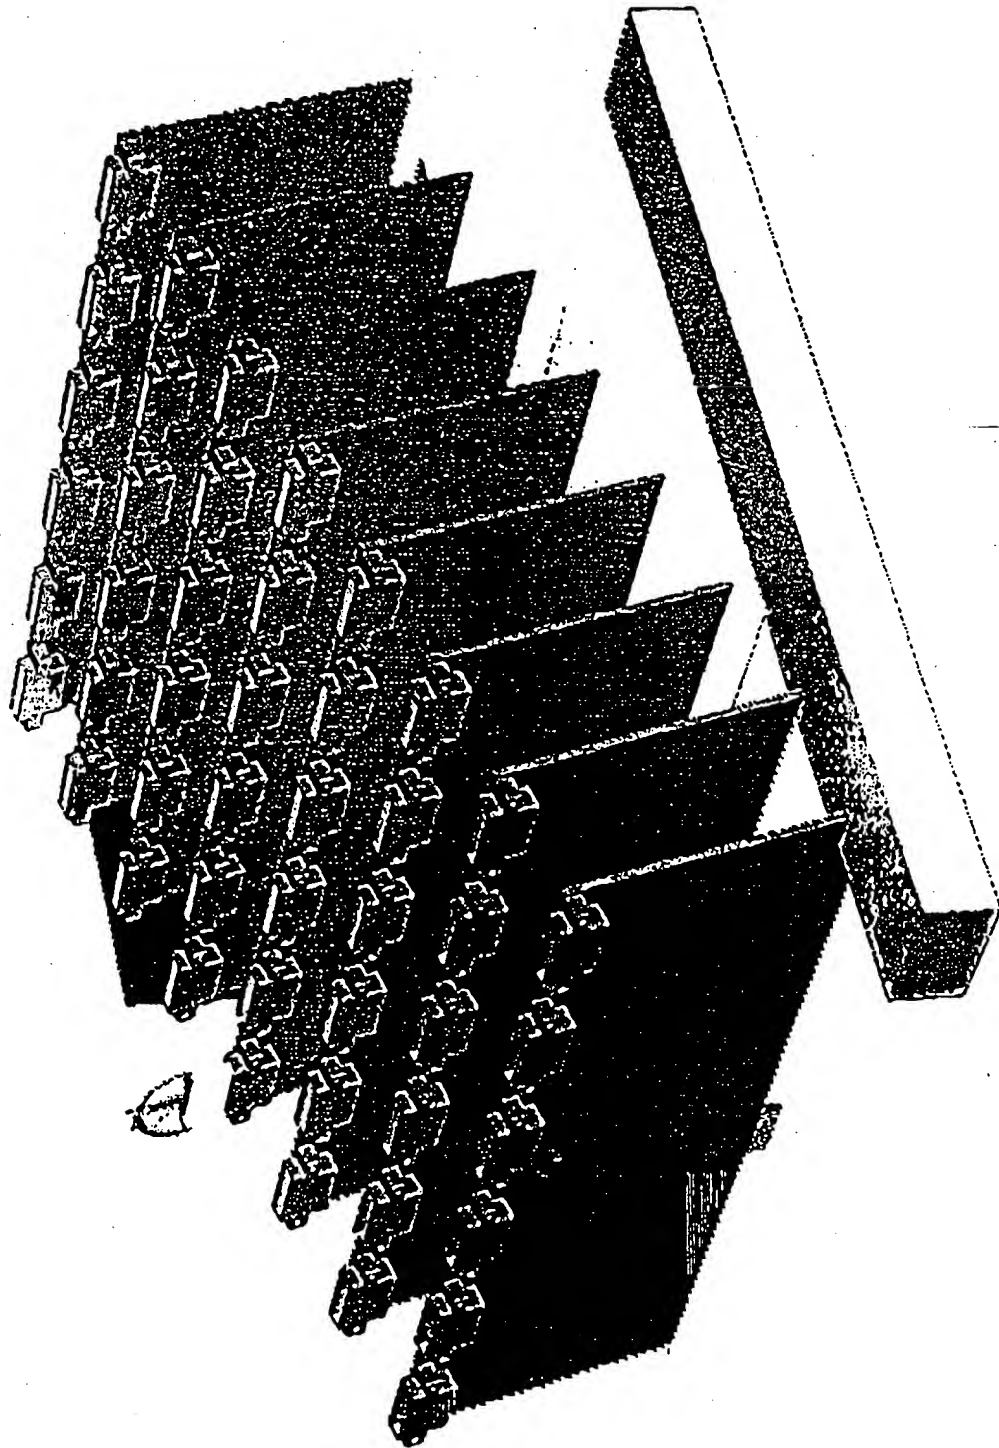


FIGURE 7

FOOTNOTES

SOFTWARE FOR HYDRA

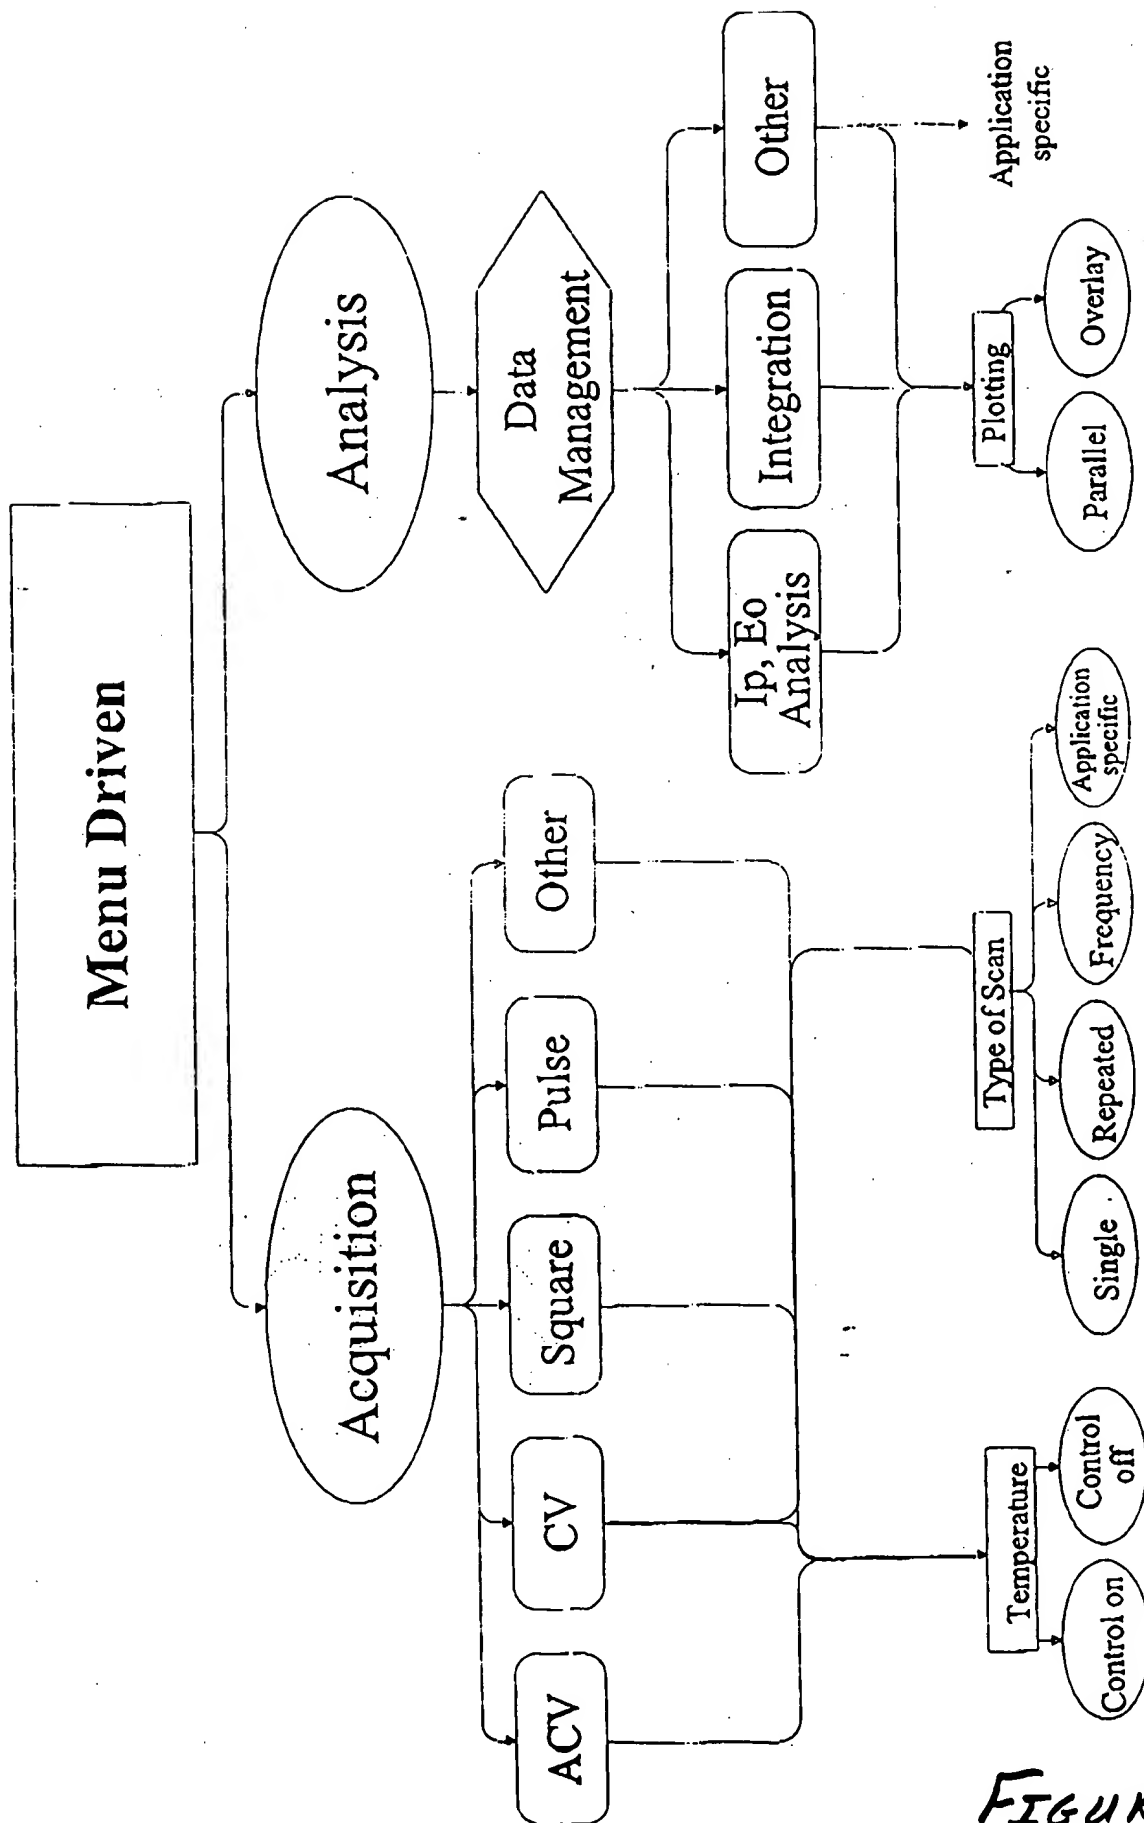


FIGURE 8

09760384-01101

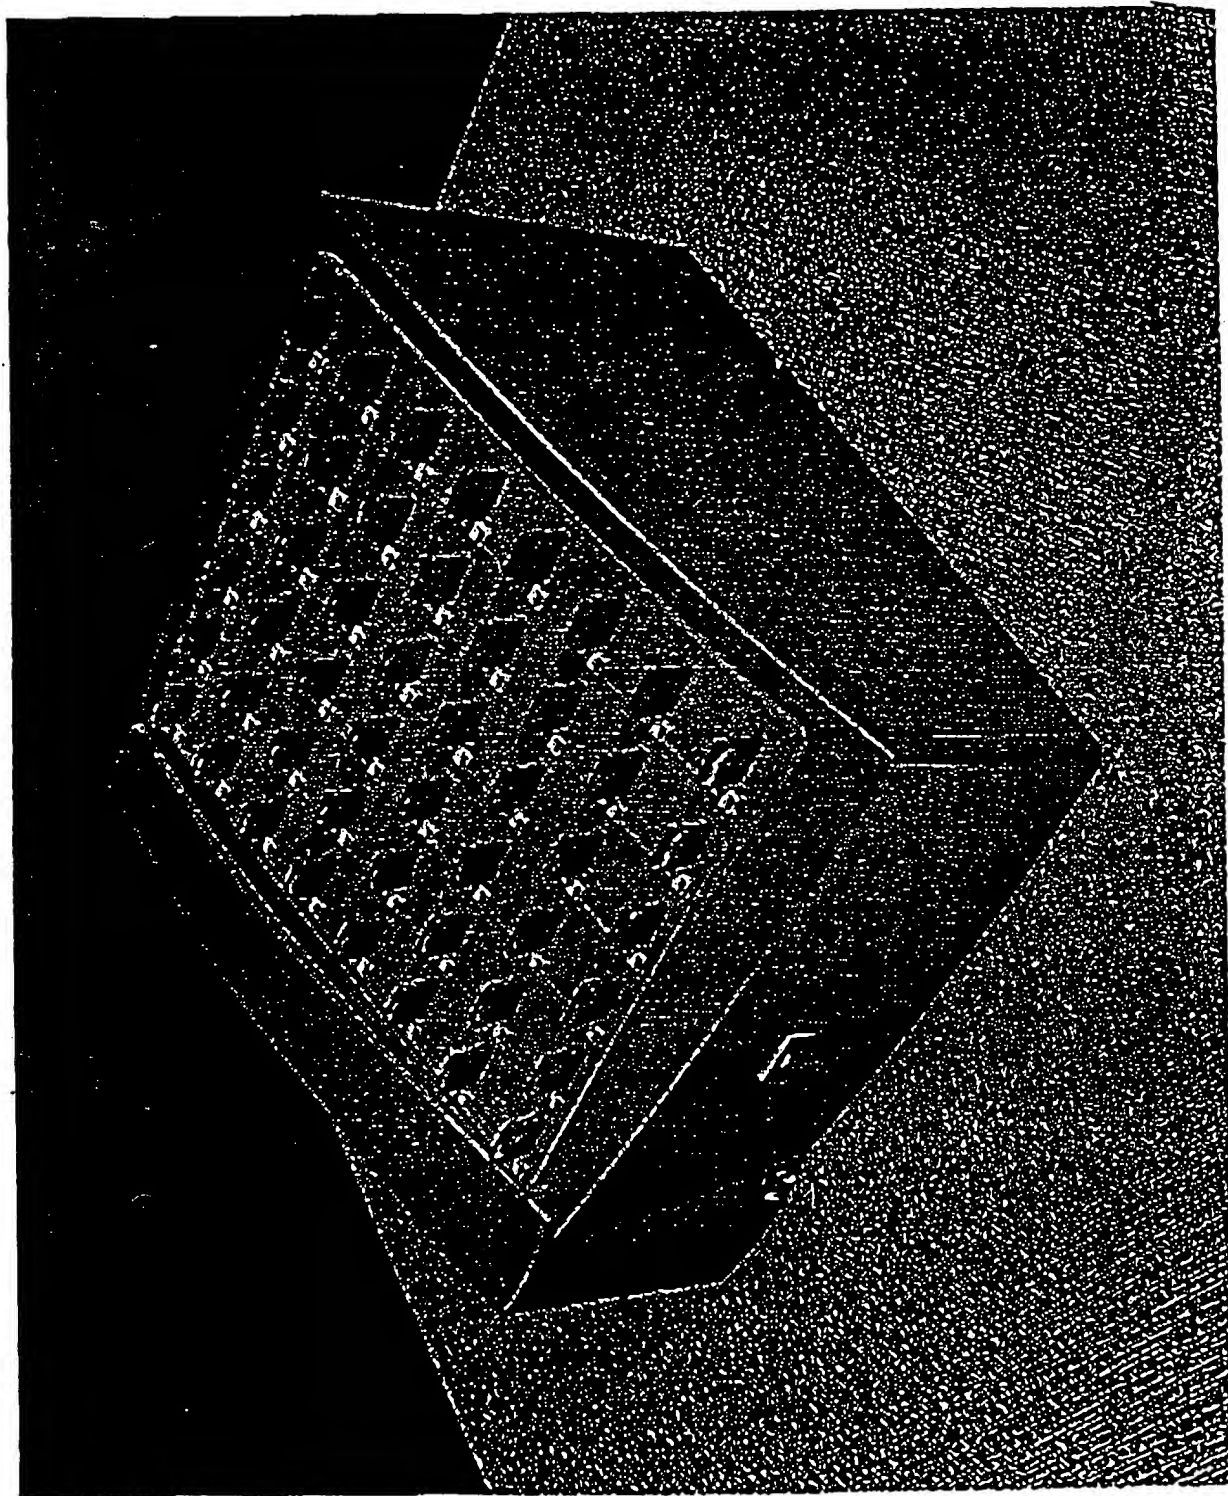


FIGURE 9

09750384-01101

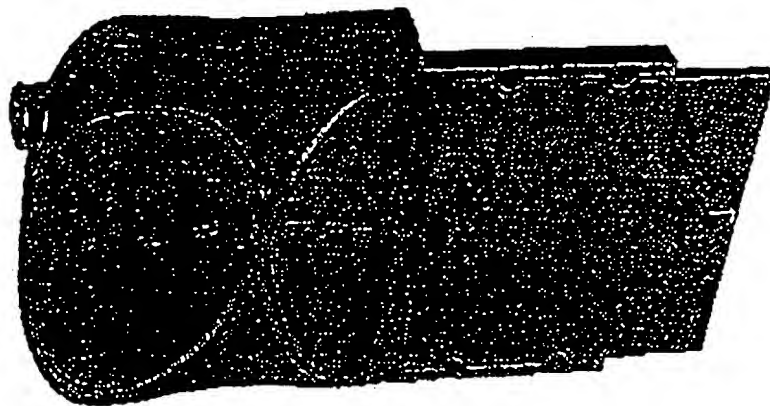
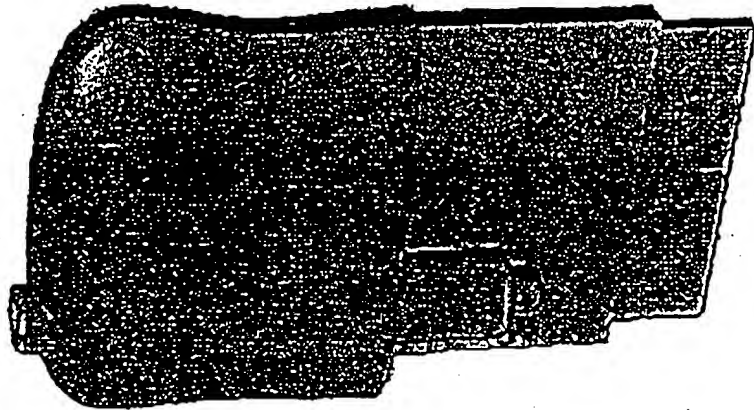


FIGURE 10

- Bar coded "reference" sheet, stored in tray under unit, with bar coded protocols, bar coded well and slot id's, bar coded commands (e.g. "cancel", "done", etc.)
- I Standard bar code wand (preferably with built-in decoder), housed in the tray (hence hidden when not in use)
- Serial (RS-232/485) interface (preferred), or "keyboard wedge"
- Multi-code support (Code 39, Code 128, etc.)
- Bar code on chip carrier (1 code per "8 pack"), identifying test, batch, etc.
 - Peel off labels, with same code as on carrier, with each "8 pack"

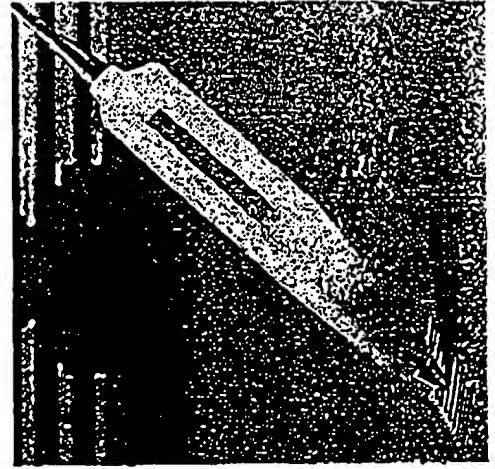


FIGURE 11

- Bar code usage scenario
 - User fills "8-pack" (all 8, or partially) from a 96 well plate, or from individual sample containers (PCR tubes, vacutainers, etc.)
 - Pull out tray (with bar code reference sheet) and grab wand
 - Scan "start" code
 - Scan protocol code from sheet (will remain in effect until "done" is scanned)
 - Scan chip code from carrier (will remain in effect until "done" is scanned)
 - For each cartridge, user will
 - ☐ insert the cartridge in an open slot. Unit senses new chip automatically
 - ☐ scan the sample ID by either
 - scanning 96 well plate bar code from plate and well code from sheet
 - or scanning unique sample ID from container
 - or scanning "no ID" from reference sheet
 - Scan "done" code. The protocol can now be started on these cartridges

FIGURE 12

- Bar code concept benefits
 - No keyboard entry (all routine setup can be entered via bar coding)
 - All routine entries accomplished while in front of unit (no going back & forth between PC & Hydra)
 - All bar code entries done from small, flat surface in front of unit
 - No need to label each chip or each slot (which would compromise appearance)
 - Uses small unobtrusive bar code wand, hidden when not in use
 - Is flexible with respect to sample container (tube, 96 well plate, etc.), chip usage (by row of 8, or by individual chip), and lab bar coding method

Figure 13

TOP SECRET

■ "Oil can" concept (pressure feed, small sample volume)

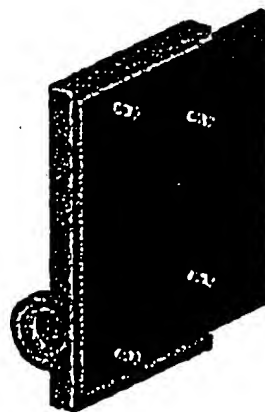
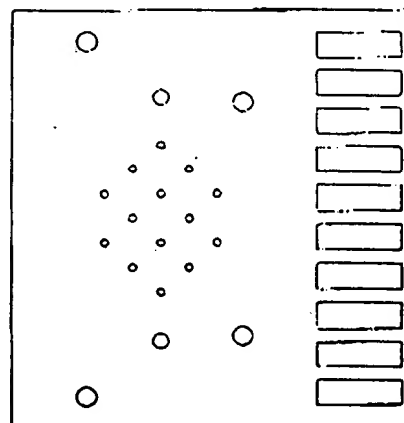
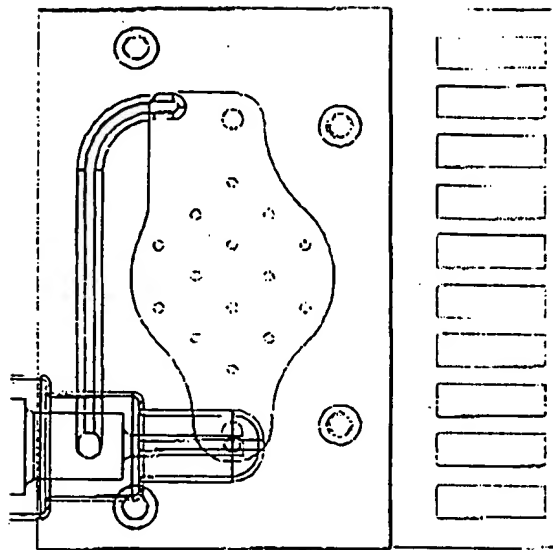
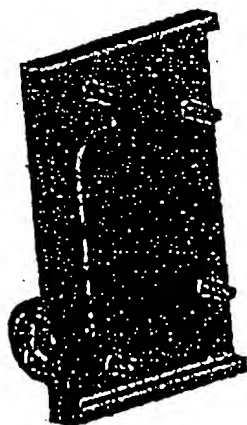


FIGURE 14

FOUO-4209260

- PCR tube concept (gravity feed, large sample volume)

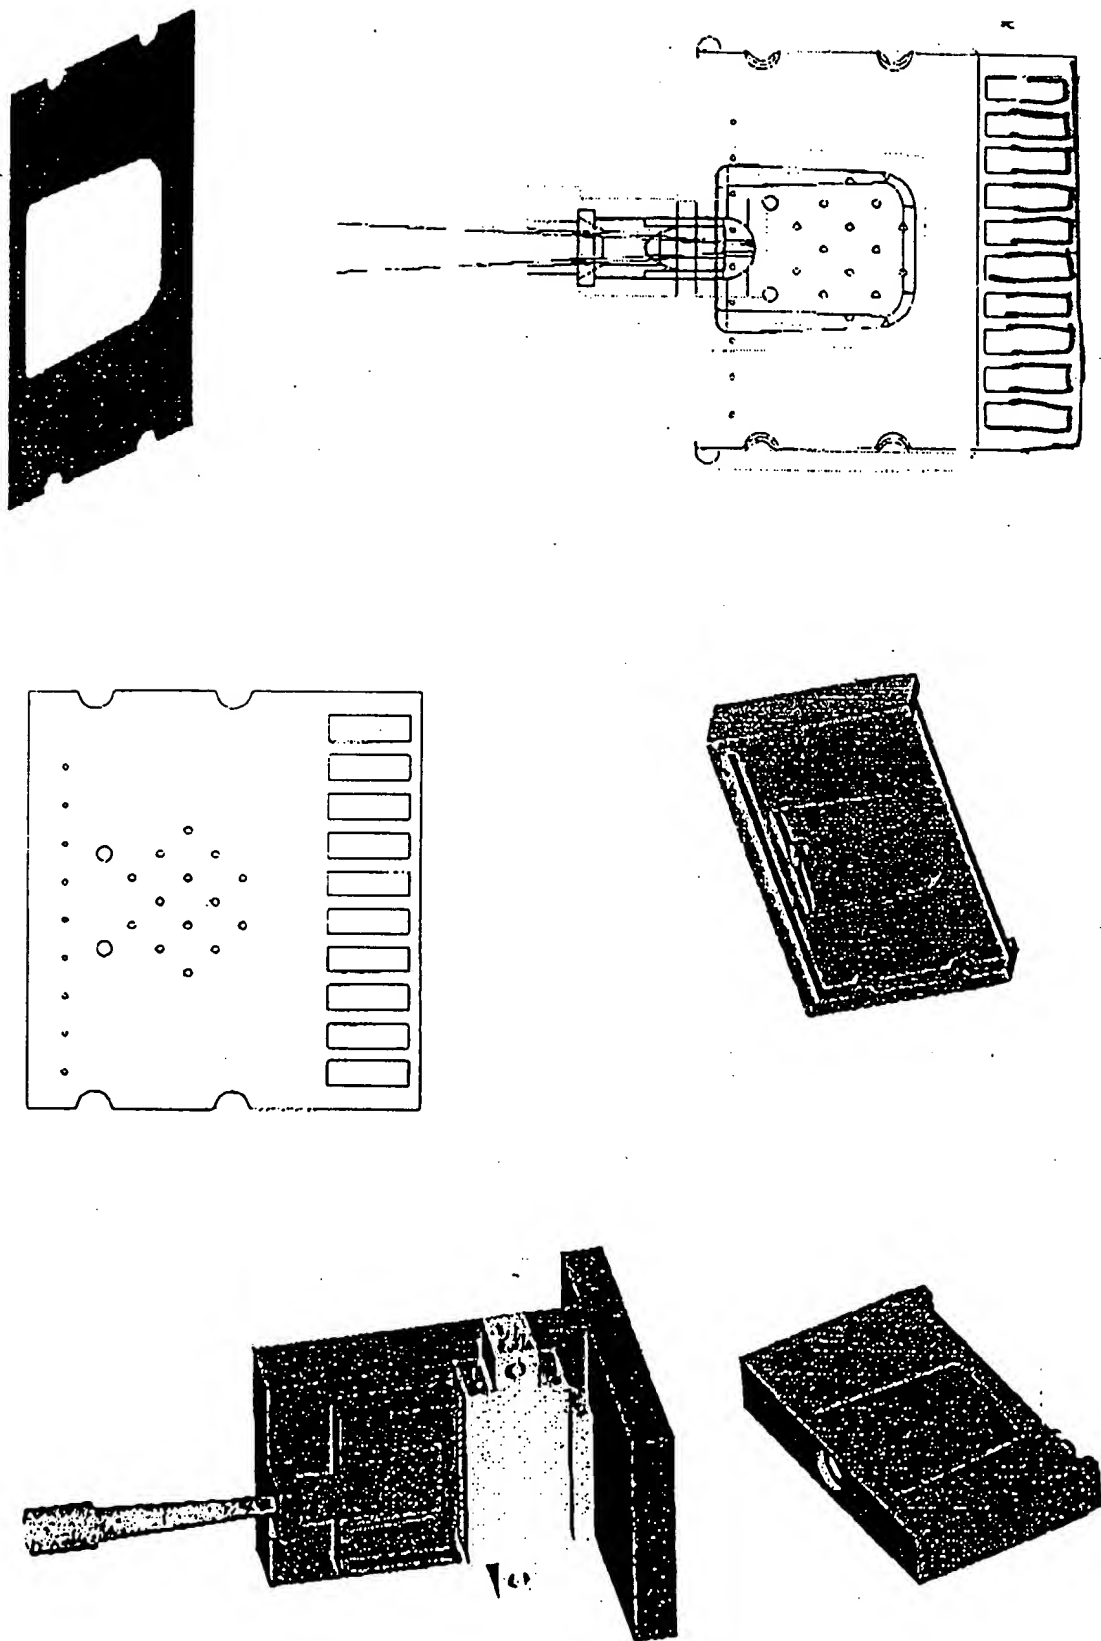


FIGURE 15

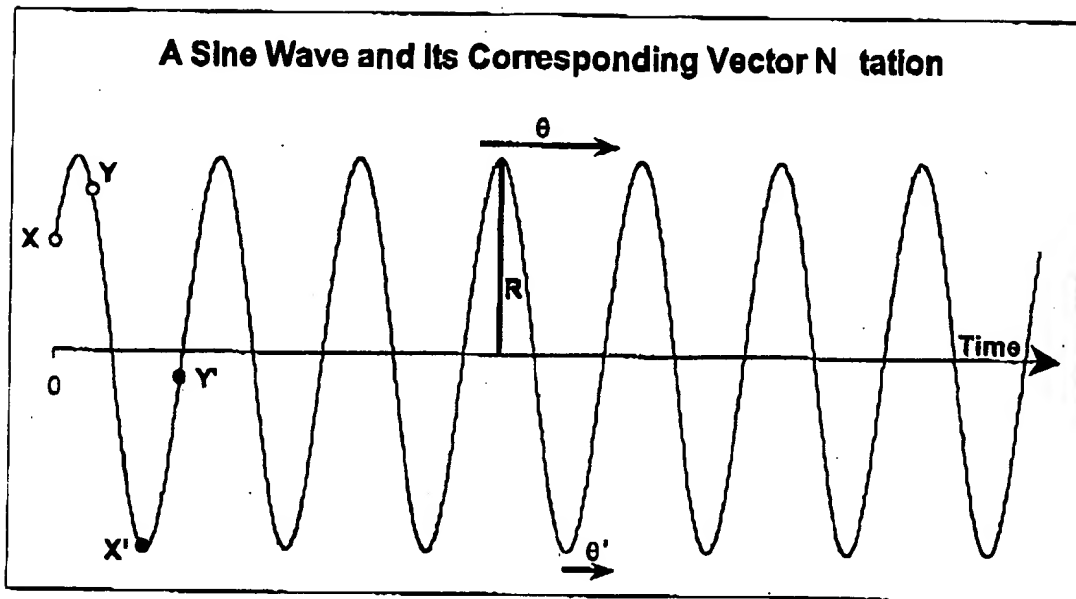


Fig
16

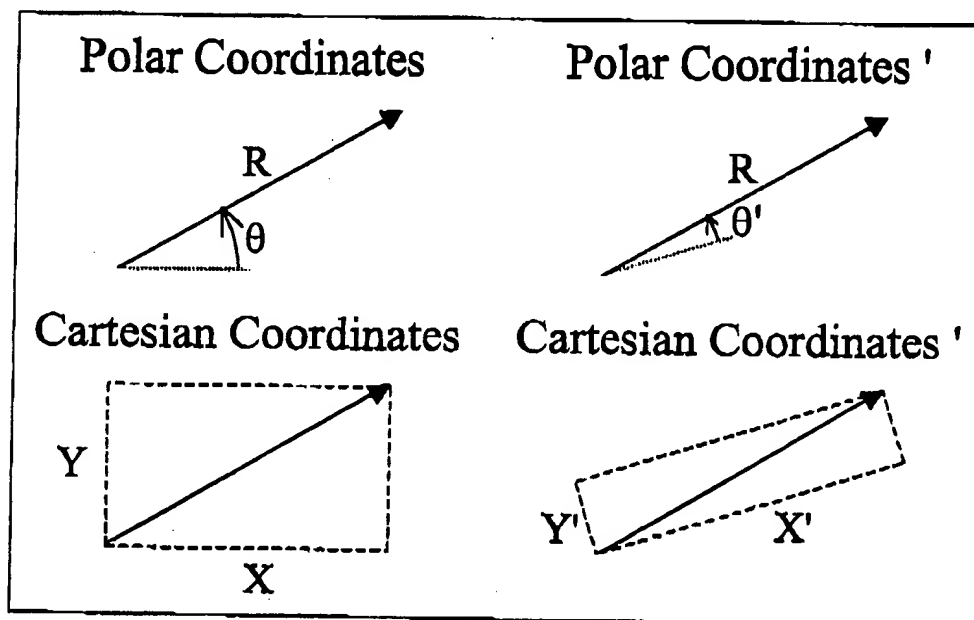


Fig
17

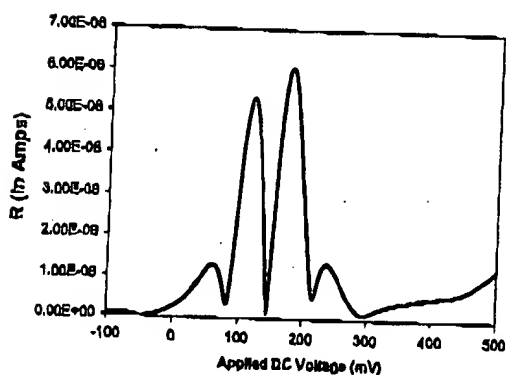


Fig
18

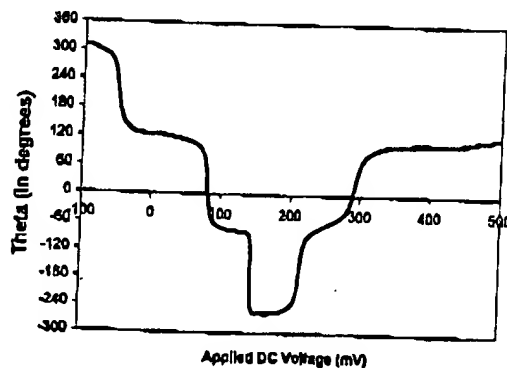


Fig
19

Fig
20




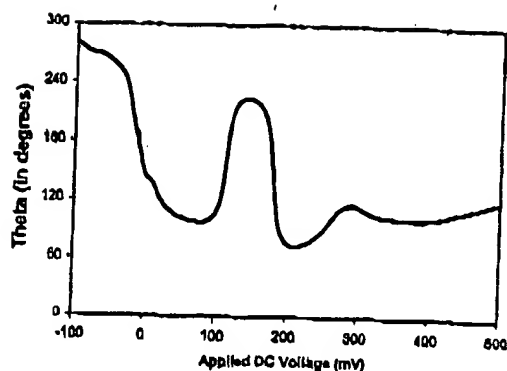




Fig
21

22

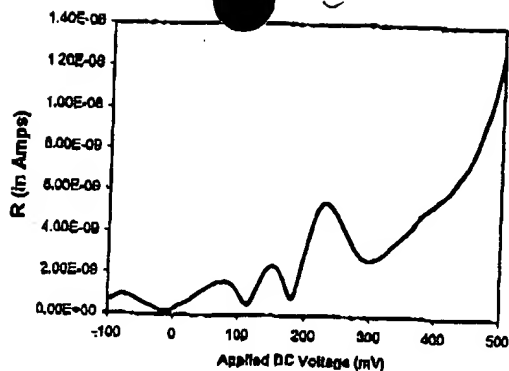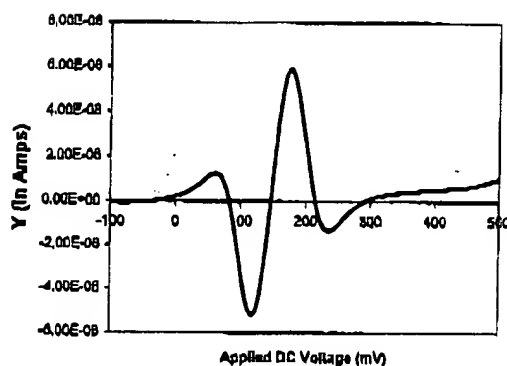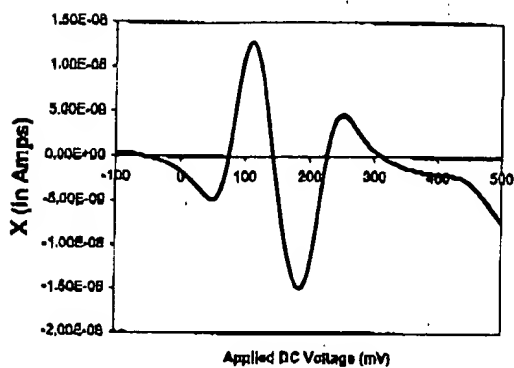


23

24

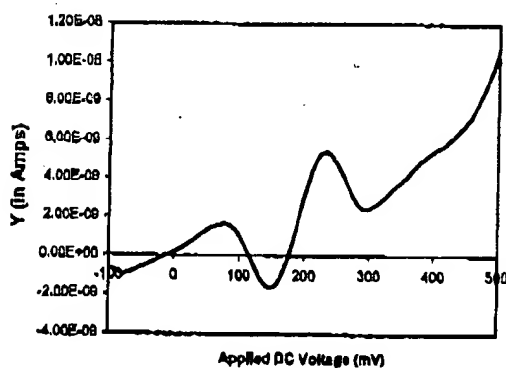
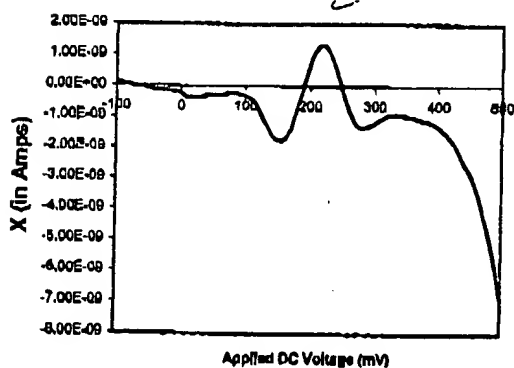


25



09200600104

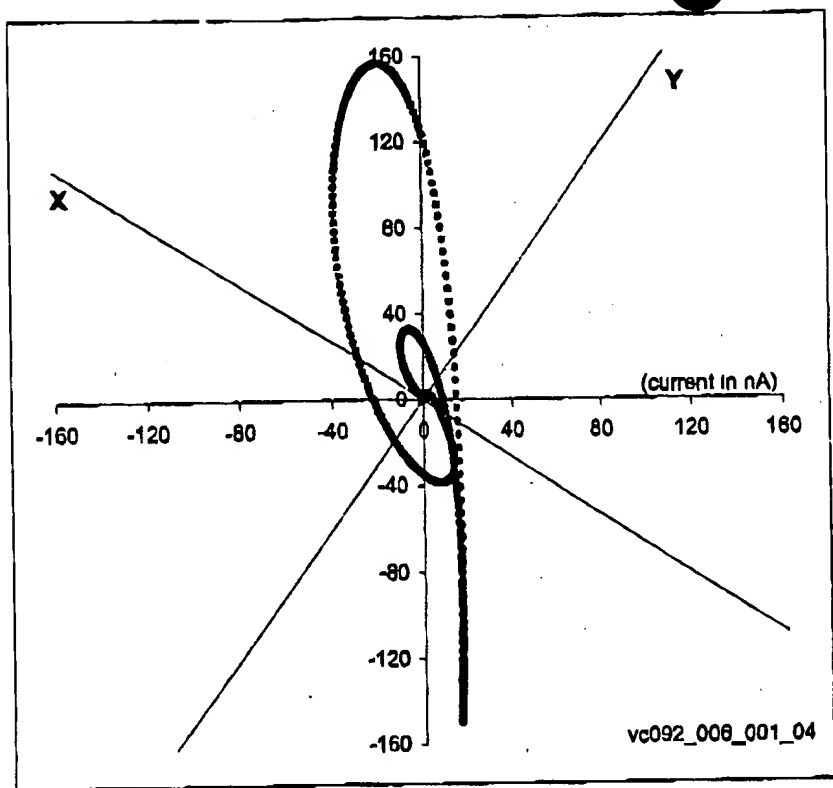

26

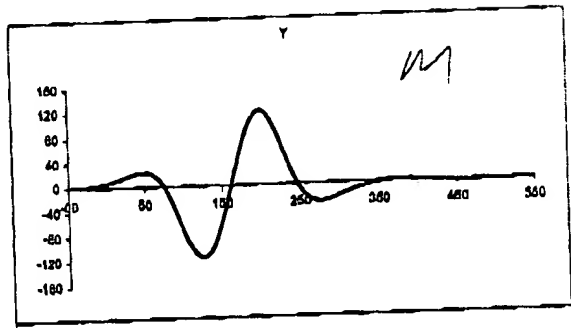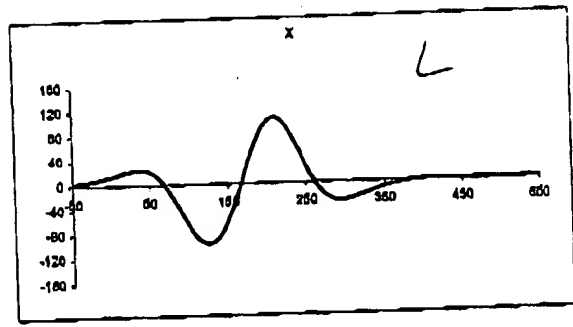


28

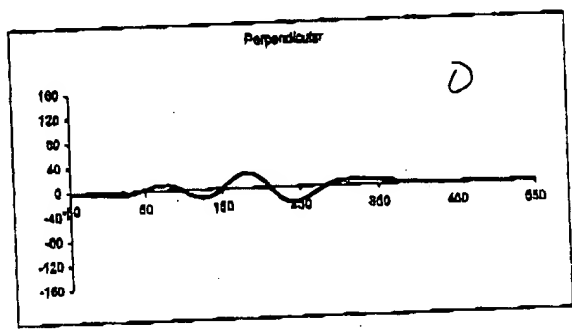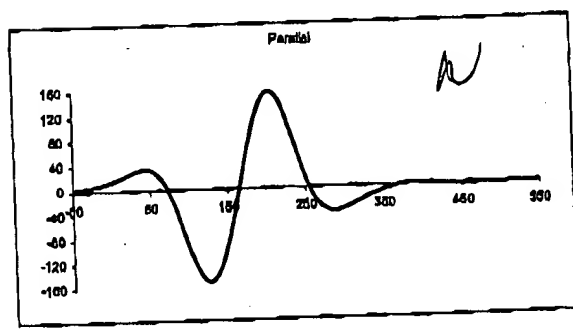



30

29



31

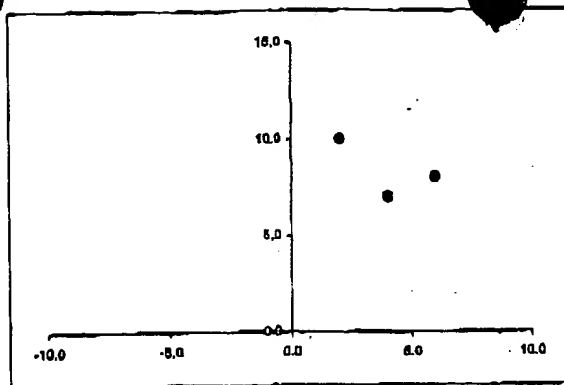

32

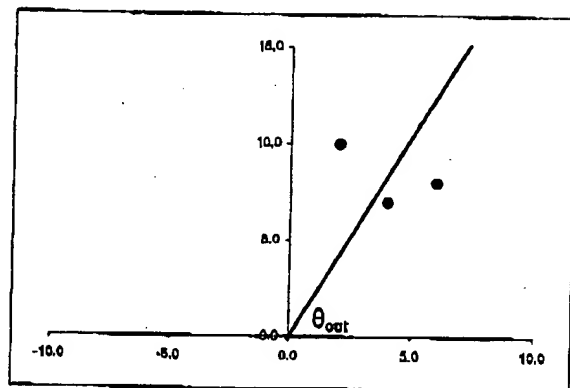
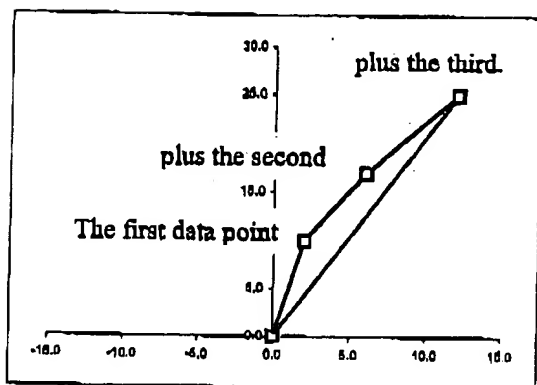


33

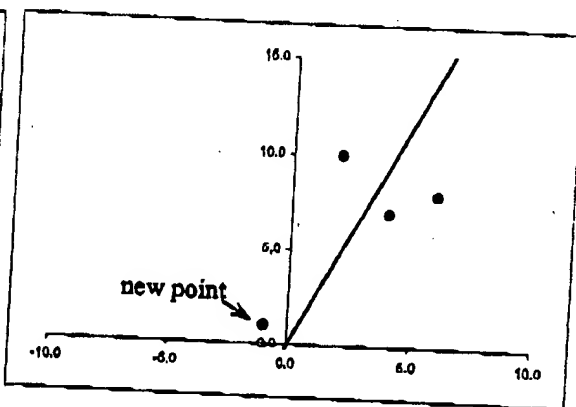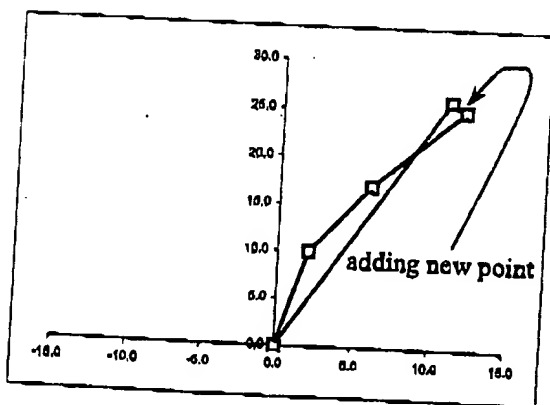


35

36

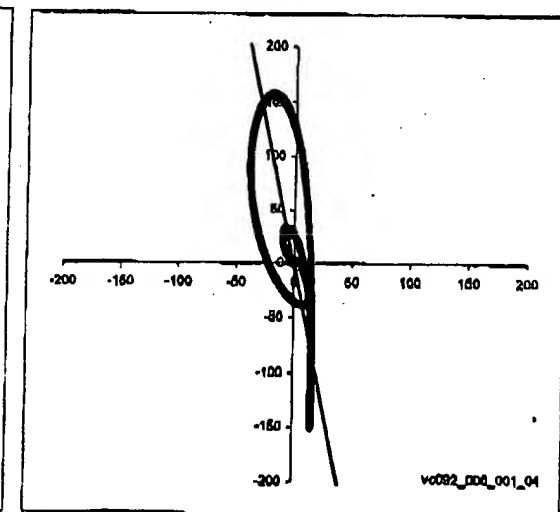
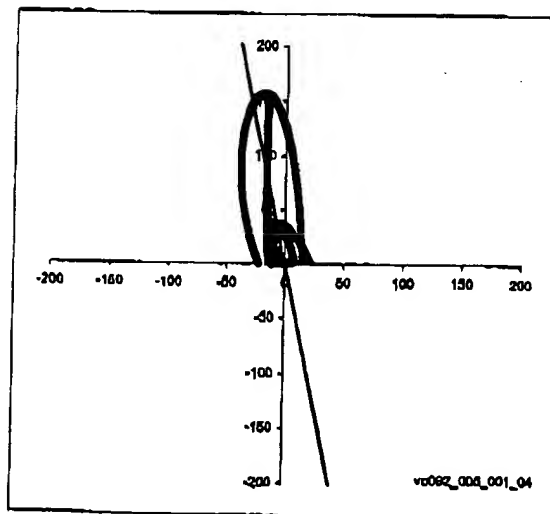


37


38

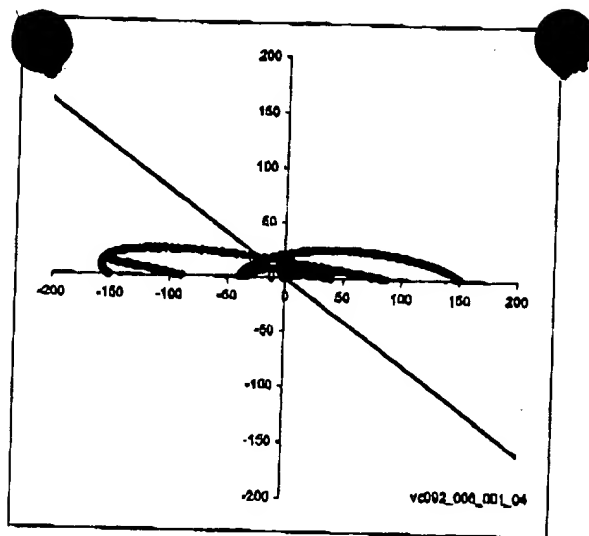

39

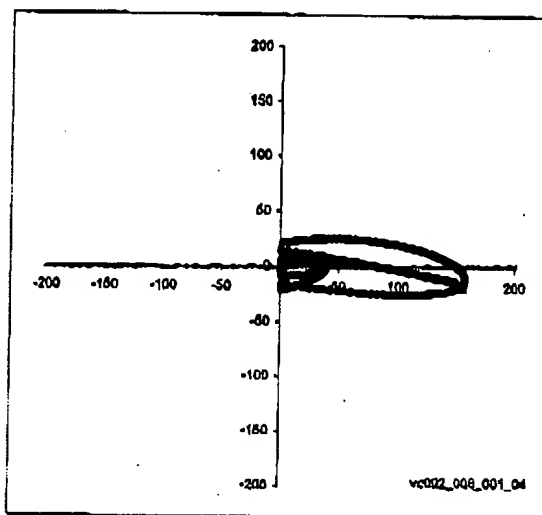
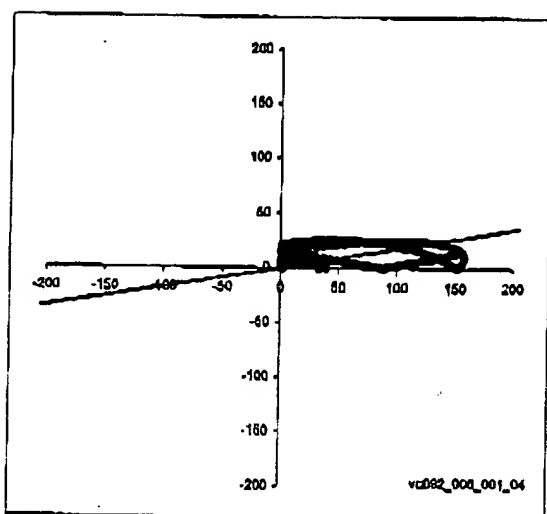


40

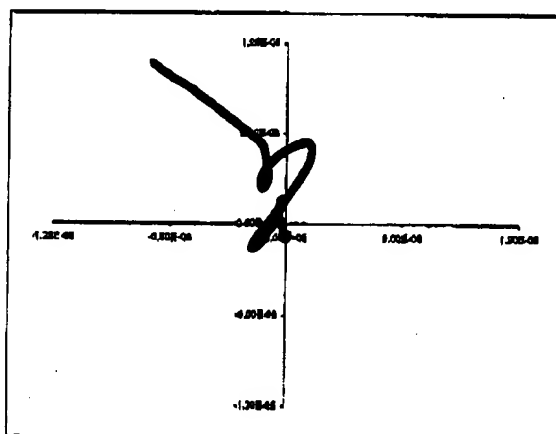



41

42

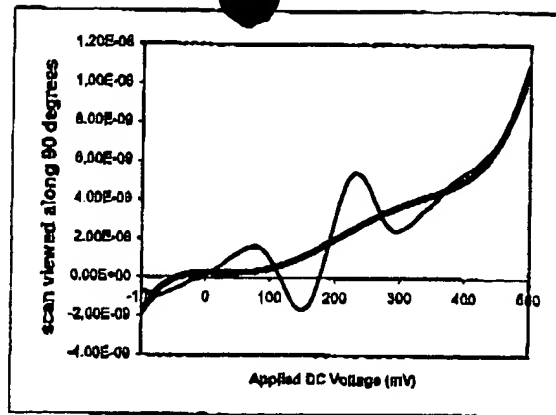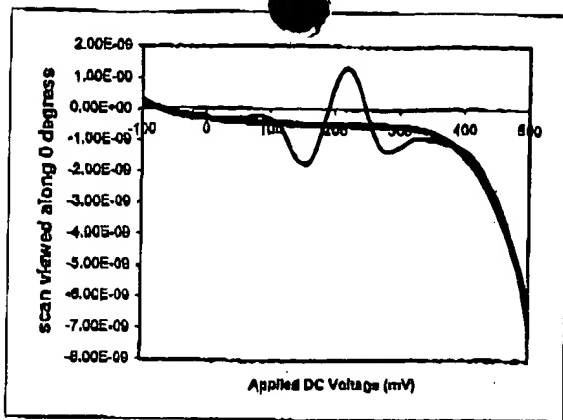


43

44

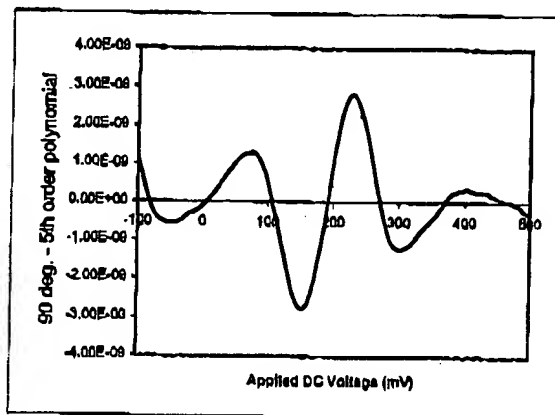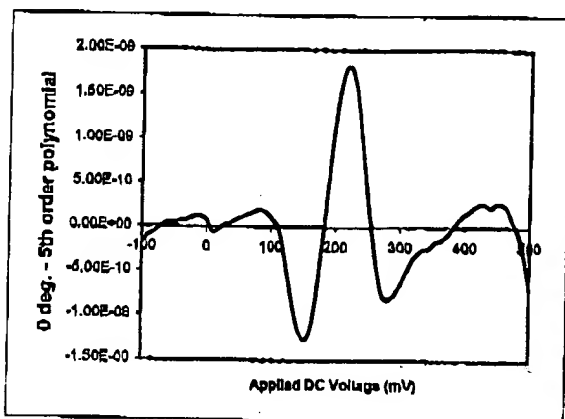


45

46

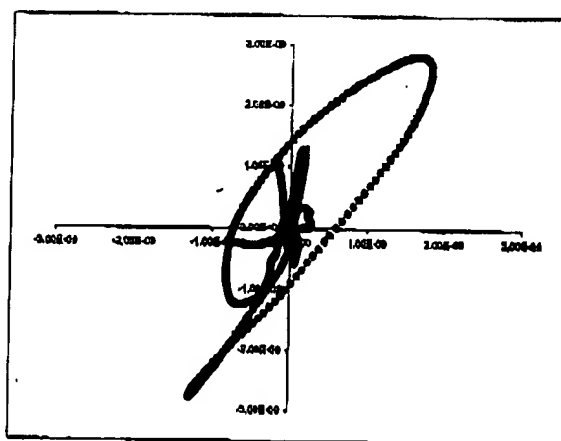

47


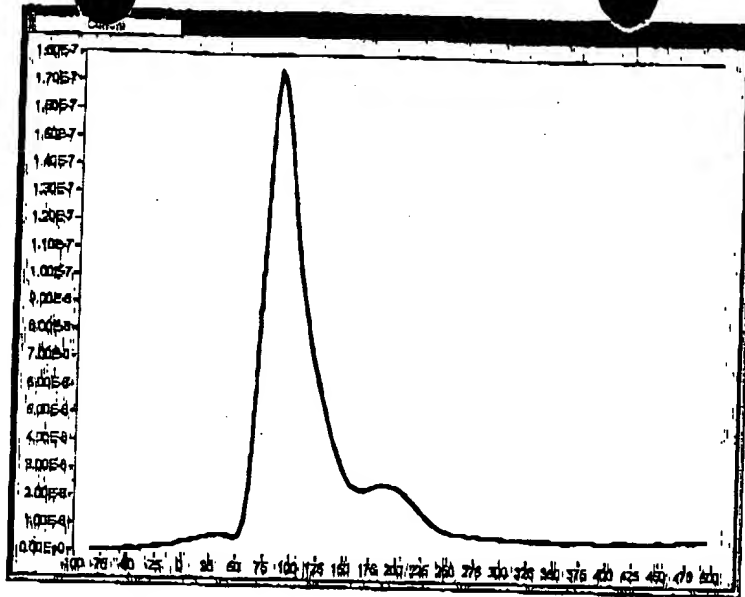


48




49

50

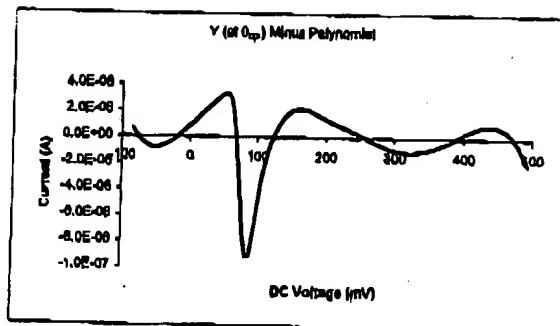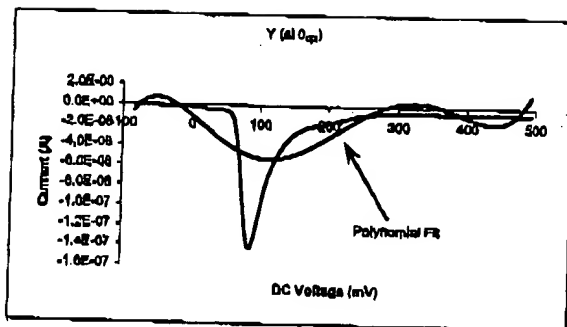


51

007609260




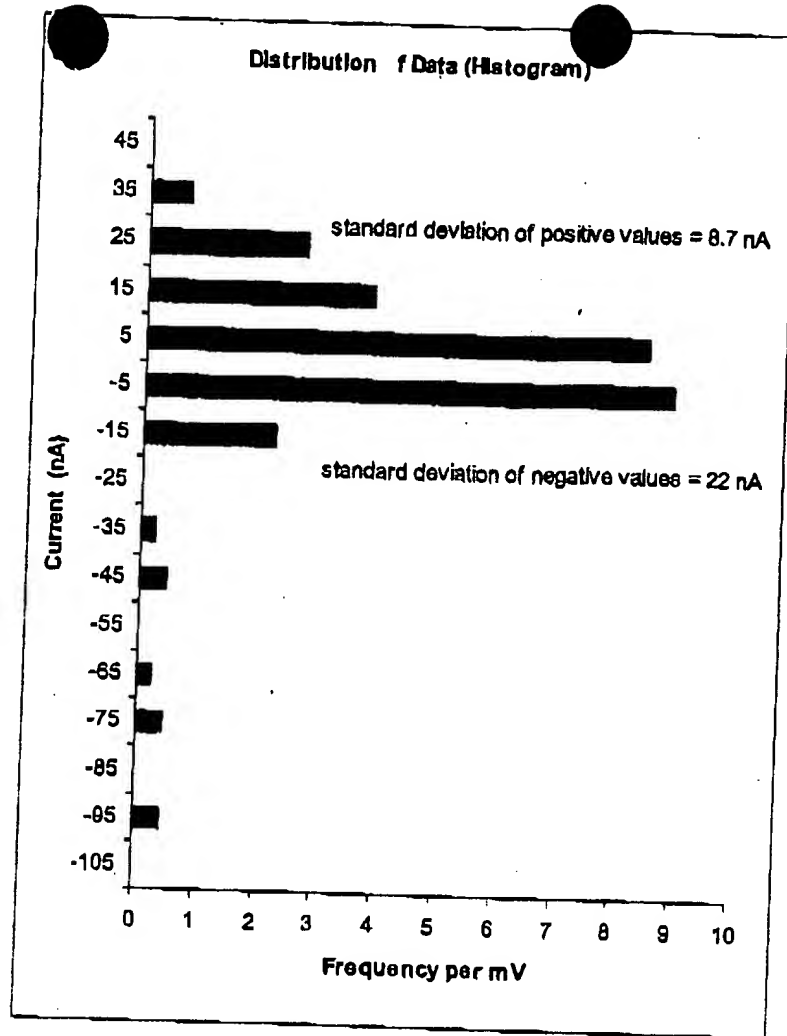



52

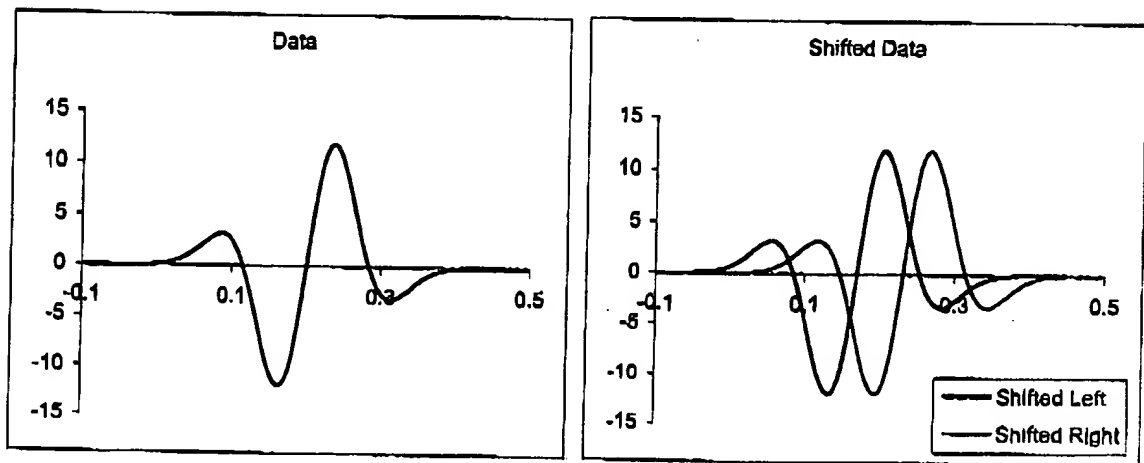


53

54

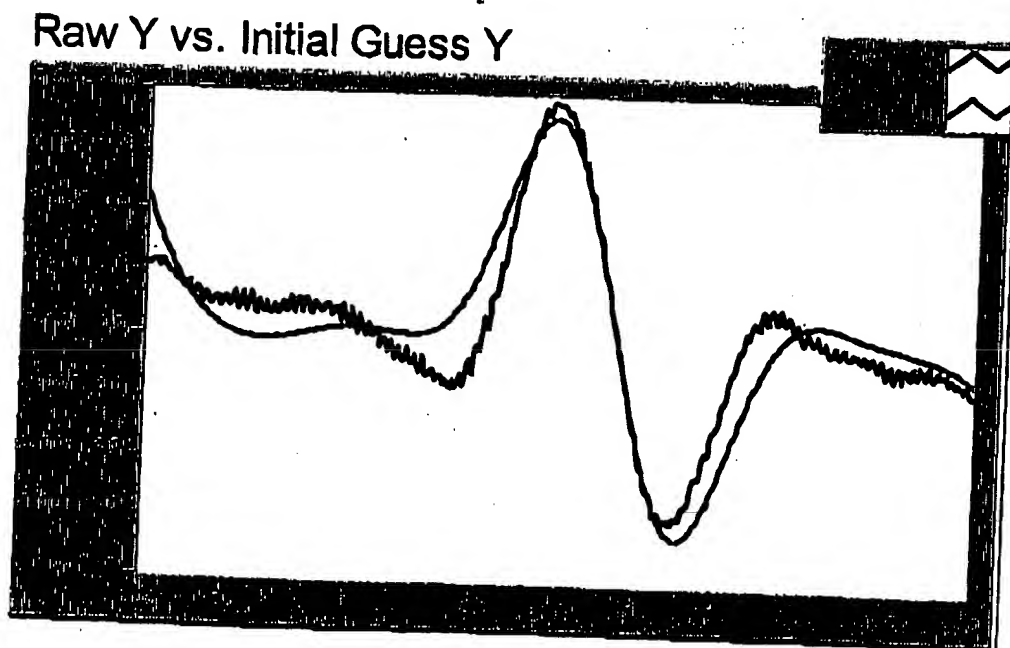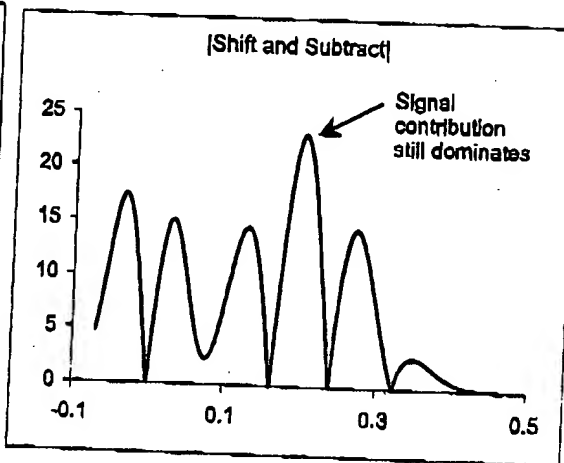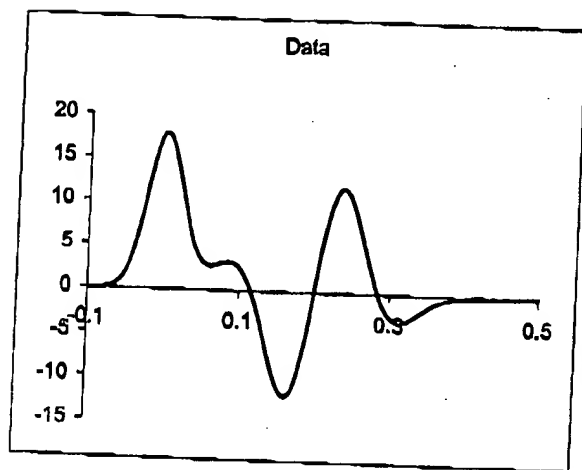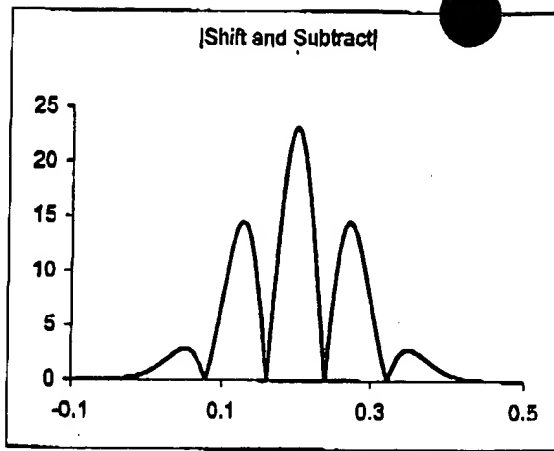


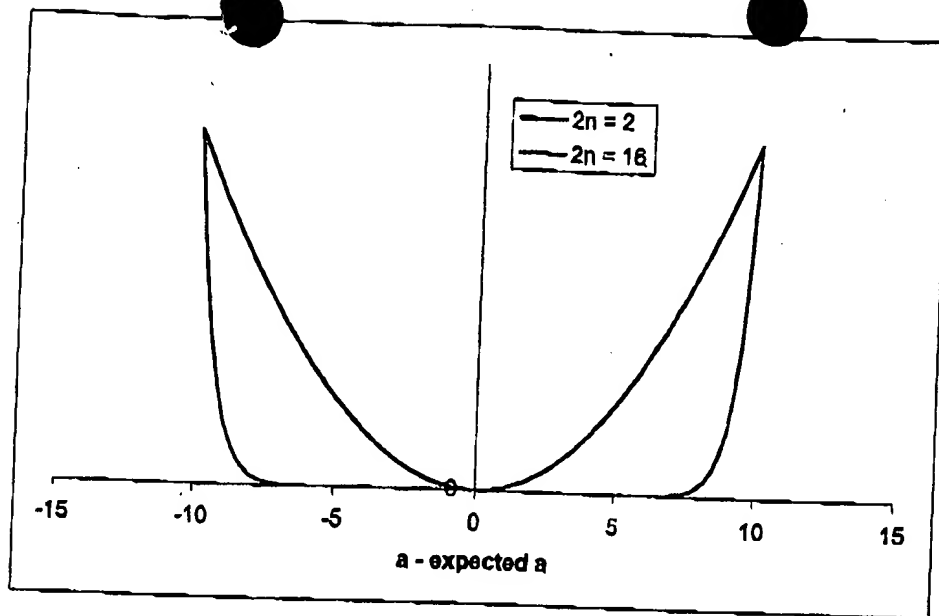

59

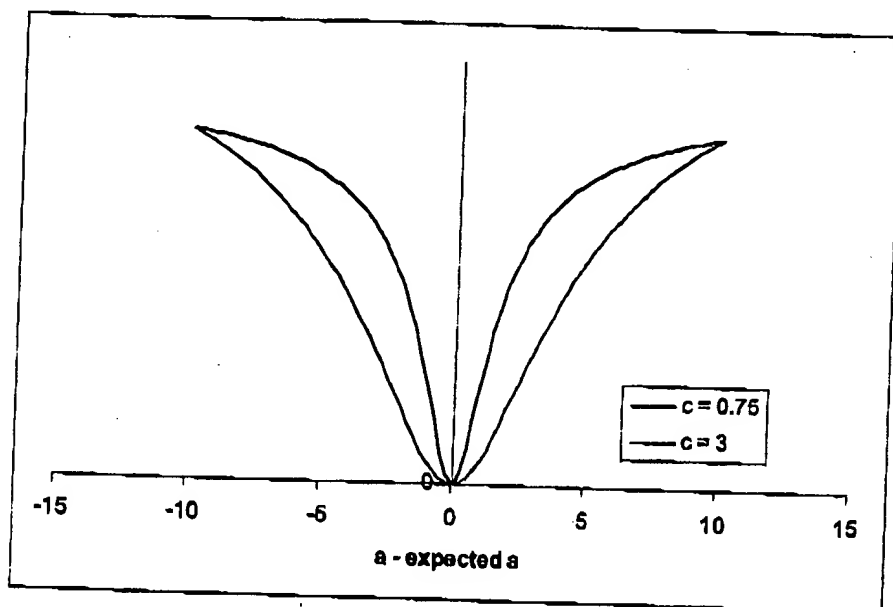


60

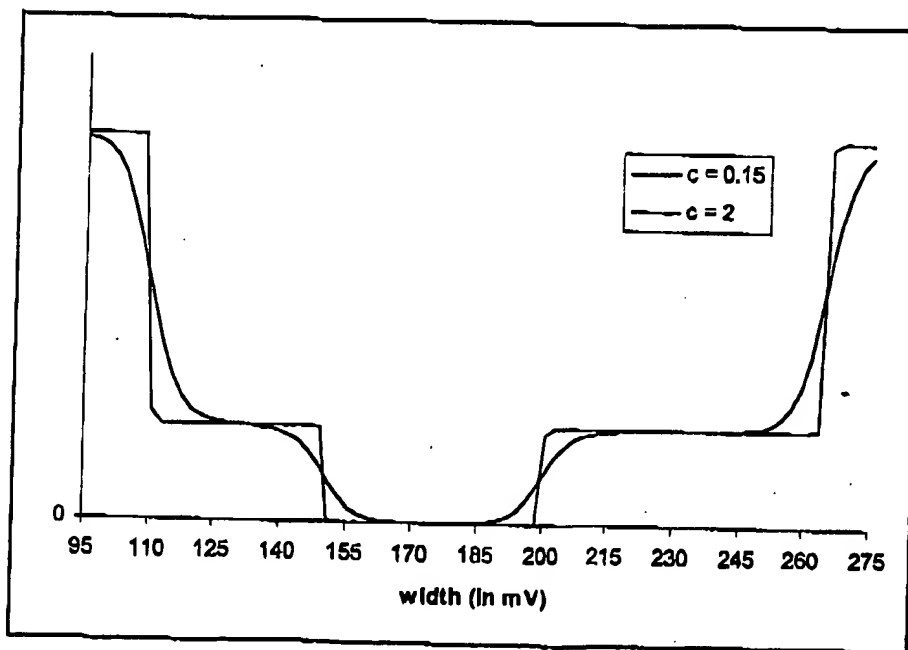


61

FOUFO" H3E09260


Simulated Noisy Data and Simulated Fit

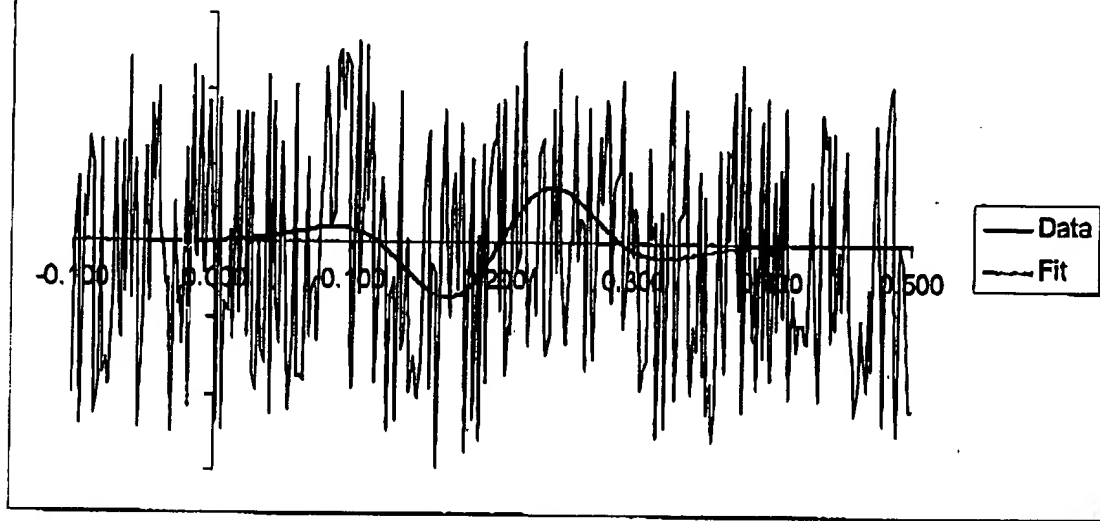

62

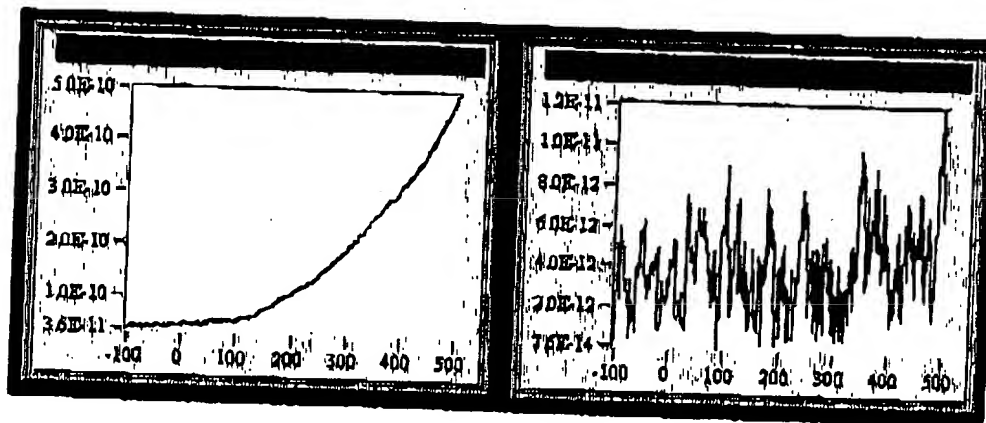

64

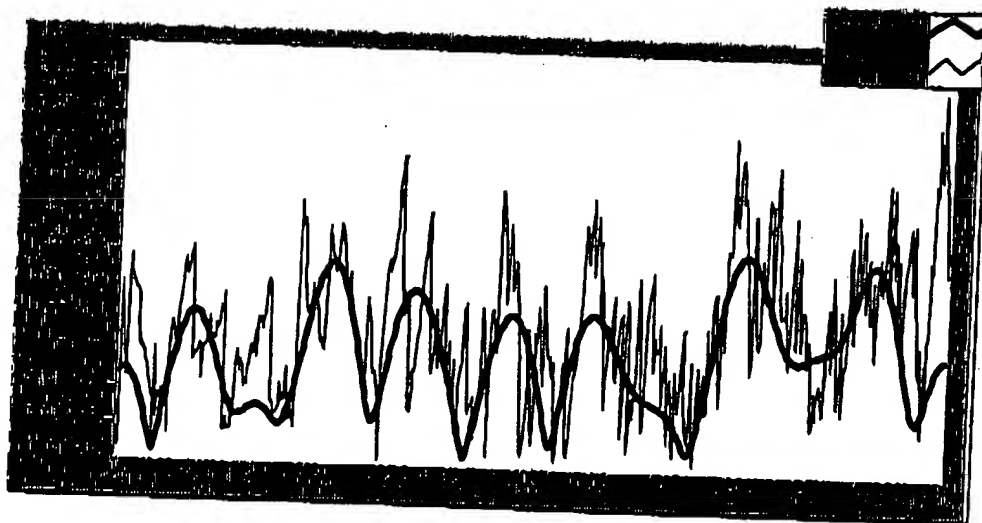


65

63

FOI b7D - b7E, b7C, b7D

66

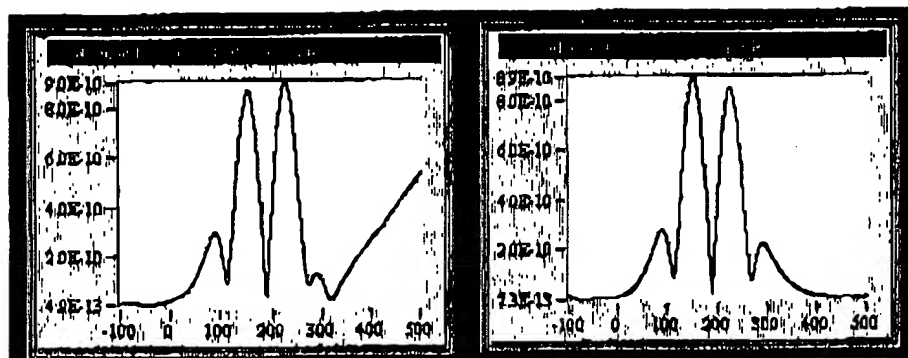

67